

K2 POWER M FRAK

Technical Sheet


Tweeter



SPECIFICATIONS

Nominal power	25W
Maximum power	150W
Sensitivity	91dB
Nom. impedance	4Ω
Frequency response	600Hz-32KHz
Cone	Aluminium/Magnesium M-profile
Surround	TMD®
VC diameter	25mm 1"
Net weight	85g

FREQUENCY RESPONSE/IMPEDANCE

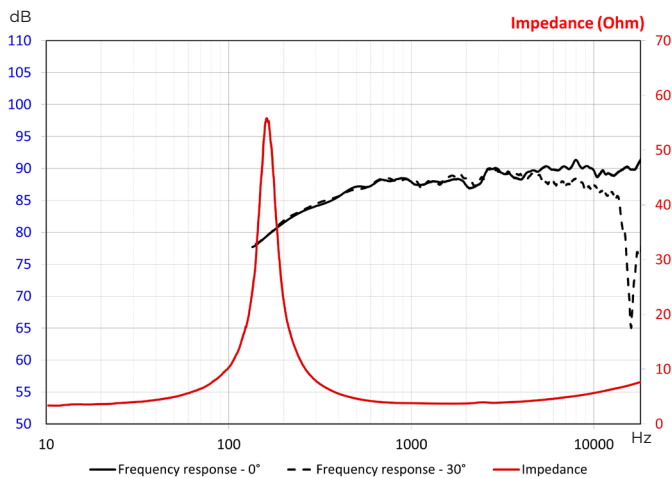

PARAMETERS

Impedance	3.2Ω
Fs	180Hz

MECHANICAL DRAWING

