


# ES 165 KX3E

## Product Sheet

MADE IN  
FRANCE

The fourth generation of K2 Power, with its emblematic aramid fibre cone, remains true to K2's precious and distinctive DNA, by focusing on performance, power and style, while incorporating patented innovations to deliver the best. Designed, manufactured and developed in our workshops in France, the 3-way component kit ES 165 KX3E also features the FRAK tweeter, an exclusive Focal technology that lies behind sensational treble. The listening experience is marked by unparalleled harmonic balance.

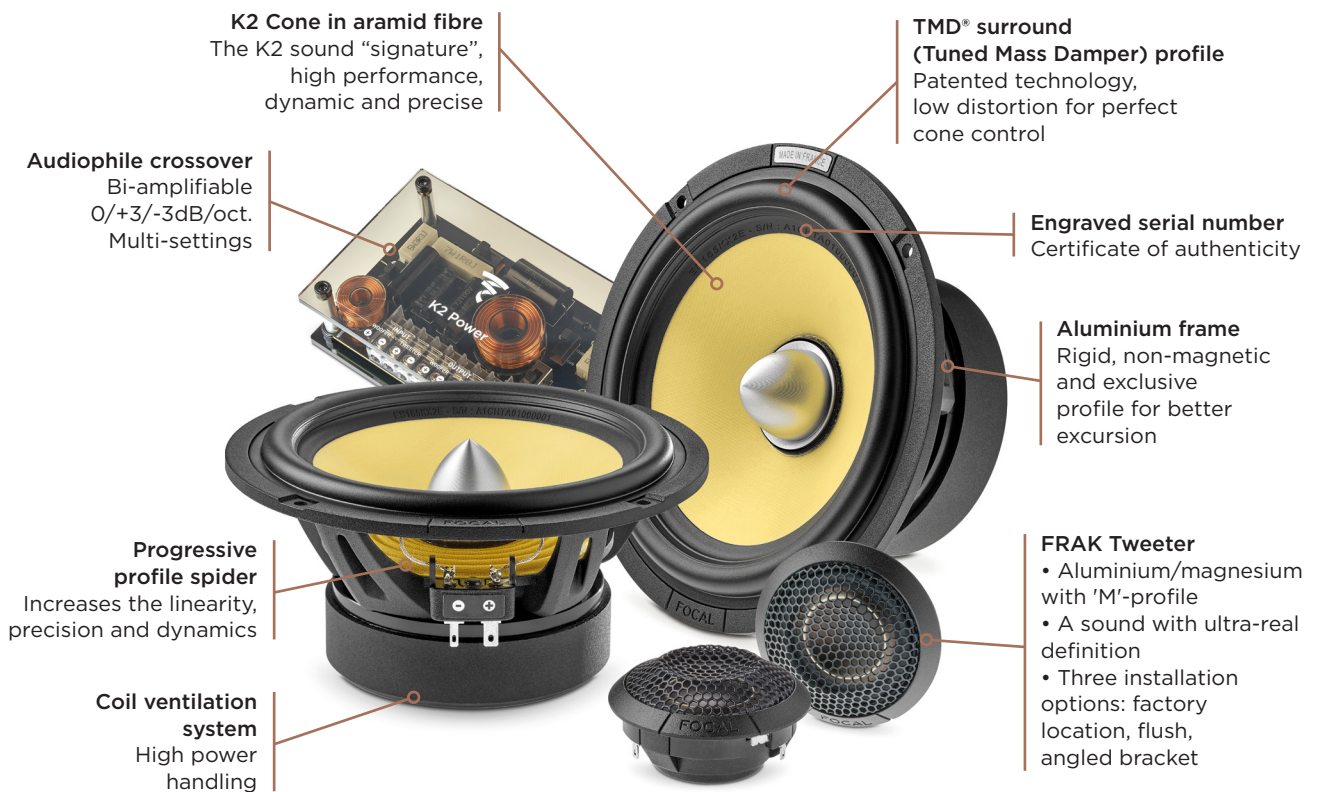

### Key points

- Made in France in the Focal workshops
- K2 Cone
- FRAK tweeter from the K2 Power M range
- Tweeter/midrange bracket
- Robust design and high quality materials
- Exceptional power handling
- Aluminium grilles included

| Type                   | 3-way component kit              |                                  |
|------------------------|----------------------------------|----------------------------------|
| Product                | Woofer                           | Midrange                         |
| Maximum power          | 240W                             | 100W                             |
| Nominal power          | 120W RMS                         | 50W RMS                          |
| Sensitivity (2.83V/1m) | 93dB                             | 88dB                             |
| Frequency response     | 45Hz - 22kHz                     | 45Hz - 22kHz                     |
| Impedance              | 4Ω                               | 4Ω                               |
| Cone                   | K2 Sandwich                      | K2 Sandwich                      |
| Diameter               | 6 1/2" (165mm)                   | 4" (100mm)                       |
| Voice coil diameter    | 1 5/8" (40mm)                    | 3/4" (20mm)                      |
| Depth                  | 3" (76mm)                        | 1 3/8" (33.5mm)                  |
| Magnet                 | Ferrite                          | Ferrite                          |
| Surround               | TMD®                             | TMD®                             |
| Tweeter                | Aluminium, 'M'-profile           | Aluminium, 'M'-profile           |
| Crossover              | 6-12/12/12dB<br>(3/4/500/3/5kHz) | 6-12/12/12dB<br>(3/4/500/3/5kHz) |